

Bolt Boxes & Holding Down Bolts

Waxed Cardboard Bolt Boxes	Length
	229mm
	305mm
	380mm
	457mm
	534mm
	610mm
	610mm
	762mm

Polystyrene Bolt Boxes	Length
	225mm
	300mm
	375mm
	450mm
	525mm
	600mm
	600mm
	600mm

Expanded Metal Bolt Boxes	Length
	150 x 75mm
	225 x 75mm
	300 x 75mm
	375 x 75mm
	450 x 100mm
	600 x 100mm
	600 x 100mm

Bolt Box Dissolver

Bolt box dissolver is a specially formulated solvent used to dissolve away and emulsify expanded polystyrene bolt boxes, void formers and inserts.

This dissolves the polystyrene without adversely affecting the surrounding concrete.



Sizes
5 / 25 / 205 Litres

Denso Tape

For protection of bolt heads prior to concrete pours. 75mm wide x 10m long rolls.

Also available in a range of sizes up to 300mm wide




Holding Down Bolts	Length
	M16 x 300
	M16 x 375
	M20 x 300
	M20 x 375
	M20 x 450
	M20 x 600
	M24 x 375
	M24 x 450
	M24 X 600
	M30 x 450
	M30 x 600
Special Sizes can be made to order	100 sq x 10mm washer

A full range of bolt sizes are available. Supplied in mild or high tensile steel.

Special Sizes can be made to order

Bluebay Bluefix Resin Injection & Chemical Anchors

The bluefix resin injection system has been specially developed to enable the bonding of awkward materials. The coaxial cartridge keeps the resin and aggregate separate from the catalyst until they are dispensed through the static mixer directly into the hole. The resin/aggregate specifications have been chosen to give good pumpability on installation with high tensile strength when set. Sleeves and studs developed specifically for hollow blocks and perforated bricks. Retaining collars enable use overhead as well as centralising studs in normal use.

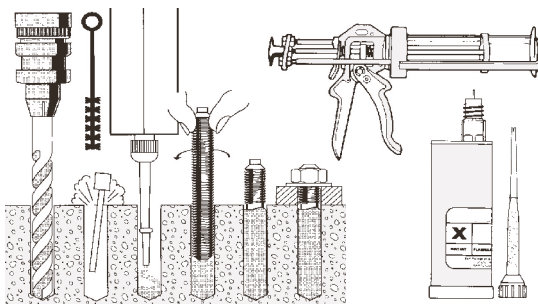

Applications


- Economy - mixer nozzle minimises waste
- Stress free fixings - close edge & spacing performance
- Resin Bonding - Resistant to dynamic loads

Bluefix polyester grout is available in a range of grades with Styrene, without Styrene and a the new industry standard 'ETA' quality

Technical Data

Products	Size
Polyester Cartridge	180 / 380ml
Pourable Polyester	5 Kg
Epoxy Cartridge	530ml
Nozzle	Standard
Nozzle	Long
Dispensing Gun	
Blow-out Pump	

Chemical Anchors

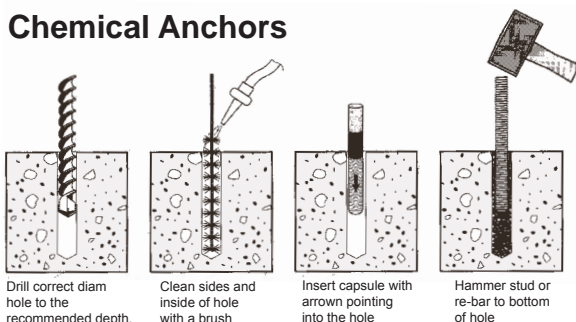

Drill correct diam hole to the recommended depth.

Clean sides and inside of hole with a brush

Insert capsule with arrow pointing into the hole

Hammer stud or re-bar to bottom of hole

Hammer-in Capsules		
Thread Diam	Hole Diam	Pack Quantity
8mm	10mm	10
10mm	12mm	10
12mm	14mm	10
16mm	18mm	10
20mm	25mm	6
24mm	28mm	6

Studs - Hot Dipped Galvanised		
Thread Diam	Hole Diam	Pack Quantity
8mm	10mm	10
10mm	12mm	10
12mm	14mm	10
16mm	18mm	10
20mm	25mm	10
24mm	28mm	5