




Thermo-loc plus X and plus C cavity closers

Cavity closers for eliminating damp and 'cold bridging' around doors, windows and sills

Advantages

- Provides an effective DPC and thermal barrier between frame, inner and outer wall leaf
- Exceeds the minimum thermal resistance of 0.45m²/K/W
- Profile extrusion allows both first and second fix
- Components available to make up 'on-site' frame formers
- Integrated & flexible water strip to reduce air leakage
- Durable and resistant to decay
- Better insulation properties than standard Polystyrene
- Low ECO Points rating

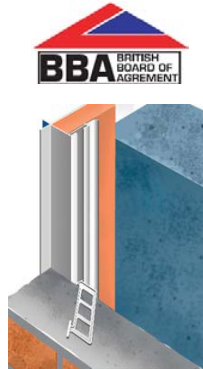

Product	Cavity Size	Lengths	Pack Size
Thermo-loc plus X	50mm	2.4m	10
Thermo-loc plus X	65mm	2.4m	10
Thermo-loc plus X	75mm	2.4m	10
Thermo-loc plus X	100mm	2.4m	10
Thermo-loc plus C	50mm	2.4m	10
Thermo-loc plus C	65mm	2.4m	10
Thermo-loc plus C	75mm	2.4m	10
Thermo-loc plus C	100mm	2.4m	10
Fixing Ties	-	-	30


- Rigid profile extruded in white UPVC with blue strip
- Extruded Polystyrene (XPS) insulation 0.028W/mK
- Coated Polystyrene (CPS) insulation 0.030W/mK

DACATIE Insulated Cavity Closers

TF1000 Insulated Cavity Closer

TF1000 is a rigid PVCu cavity closer which is filled with closed cell, CFC-free insulation. The TF8i system conforms to the requirements outlined in Building Regulations Part L referring to conservation of fuel and power, and has full BBA certification.

TF1000 when installed around window and door apertures can prevent the passage of moisture into the inner leaf of the cavity, so complying with Part C of Building Regulations.

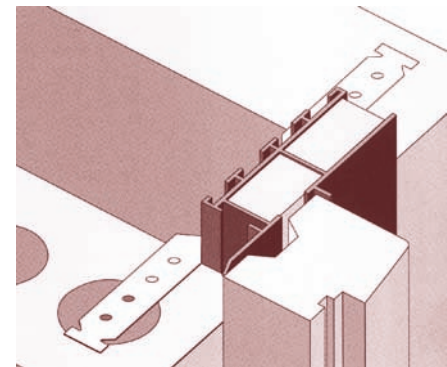

Technical Data TF1000

Product	Cavity Size	Lengths	Pack Size
TF1050	50mm	2.1, 3.0m	6
TF1075	75mm	2.1, 3.0m	6
TF1090	90mm	2.1, 3.0m	6
TF1095	95mm	2.1, 3.0m	6
TF1100	100mm	2.1, 3.0m	6
CTF 1050-1100	50-100mm	2.1, 3.0m	6


Advantages

- Complies with Building Regulations Part L
- Eliminates cold bridging at window/door reveals
- Suitable for cavities between 50-100mm
- Provides damp proof barrier between inner and outer wall at point of closure
- For use with timber, PVCu or metal window frames

DACATIE Supafix SF - Second Fix (push fit)

Dacatie Supafix Insulated cavity Closers are the economical way to achieve building regulations compliance when closing the cavity around window and door openings in second fix installations when a frame former is not required.

The rigid PVCu profile encloses a core of CFC-free insulation that forms a continuous insulated cavity closer, preventing cold bridging, damp penetration and condensation. Supafix can be used on all reveals or cavities and is suited to all types of doors and windows.



Technical Data Supafix

Cavity Size	Lengths
50mm	2.1, 3.0m
75mm	2.1, 3.0m
90mm	2.1, 3.0m
95mm	2.1, 3.0m
100mm	2.1, 3.0m
50-100mm	2.1, 3.0m

Thermabate Insulated Cavity Closers

Thermabate provides a simple and efficient method of closing cavities around openings in masonry walls. The insulating foam core prevents thermal bridging, while the PVC-U box section forms a positive damp proof barrier and key for the direct application of plaster.



It effectively prevents condensation, pattern staining and mould growth frequently associated with traditional methods of closing cavities. Thermabate closes the cavities and avoids problems encountered when supporting traditional dpc's and insulation boards during construction.

Advantages

- Continuous Insulation
- Reduced Heat Loss
- Weather Resistant
- BBA Certificate No. 91/2648

Accessories

Flange Clip (green)
Flange Ext Clip (white)
Reveal Clip (white)
Jointing Clip (blue)
Profile Brackets
Wall Fixing Ties (150)

L (mm)	W (mm)	T (mm)	Colour
3000	210	50	brown
2100	210	50	blue
3000	210	65	black
3000	210	75	white
2100	210	75	blue
3000	210	85	yellow
3000	210	90	orange
2100	210	65	Blue
2100	210	85	blue
2100	210	90	blue
2100	210	100	blue
3000	210	100	green

DACATIE Frame Formers

Dacatie insulated cavity closers can be factory assembled as three or four-sided frame formers to suit cavity widths from 50mm to 100mm. For widths above 100mm please contact us for further details.


They can be used with all window types to accept snap-in or second fix frames and provide immediate closure of the cavity. This gives the benefit of accurate, mechanically jointed frame formers, factory-made to fit specific brick opening sizes and eliminating the need for site-fabricated templates.

The time saving and speed of construction benefits when using Dacatie subframes are significant, with formers supplied flat-packed for easy assembly on site, or pre-assembled.

It is important to follow the ordering instructions when specifying pre-formed units, giving the brick opening sizes, or blockwork opening sizes in the case of check reveals.

Advantages

- Insulated cavity closer, dpc and frame former in one
- Second fix or snap-in for all window types
- Delivered to site flat-packed or pre-assembled
- Saves time on site

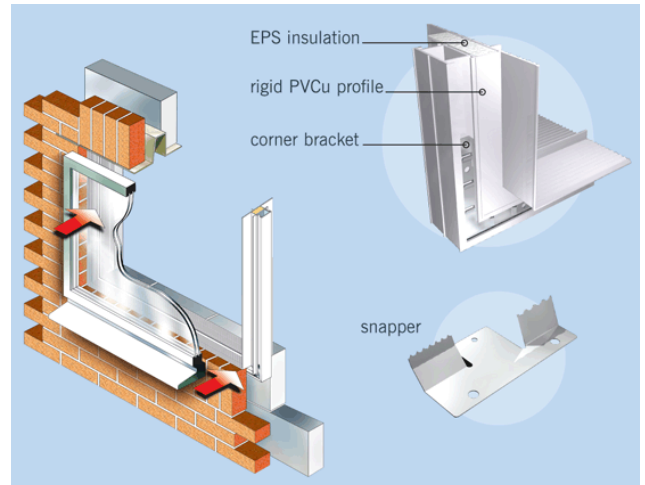

Technical Data

Cavity Size	Lengths
50 - 75mm	600 - 3600mm
75 - 99mm	600 - 4200mm
100mm +	600 - 4200mm

timloc building products Everdry Stepped Cavity Trays


Everdry stepped cavity trays - lead attached

The leaded Everdry cavity tray range is a series of products for use at the abutment of a pitched roof with a cavity wall. They differ from standard cavity trays in that they are supplied with factory fitted lead flashings. This means that the bricklayer automatically installs both the cavity tray and the lead flashing in a single operation. All the products in this cavity tray range are designed so as to comply fully with the Building Regulations, British Standards and the NHBC.


The leaded Everdry range also has full BBA certification. Key points to note are the high back upstand and the integral stopends. Both these are standard requirements with the NHBC.

The leaded Everdry range includes a large number of components which can cope with almost any wall construction. Products are available to suit brick, stone or block coursing and cavity widths of between 50mm and 150mm. The stone and block coursing trays can also be supplied to suit thicker external walls, with bed widths of up to 150mm.


Each set of leaded Everdry cavity trays include a range of standard components that work together to form a complete cavity tray system. These include stopend starter trays, corner starter trays, intermediate trays and ridge trays. Code 4 lead is supplied as standard, heavier grades are available to special order.

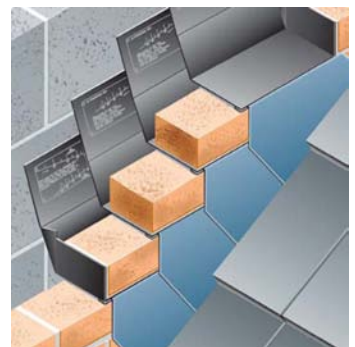


Description	Length	Handing	Product codes (cavity widths of 50 - 150mm)
Intermediate tray RH	225mm	RH	20001
Intermediate tray LH	225mm	LH	20002
Intermediate tray RH	420mm	RH	20011
Intermediate tray LH	420mm	LH	20012
Stopend starter tray	225mm	RH/LH	20031/32
Corner starter tray	225mm	RH/LH	20041/42
Ridge tray	225mm	N/A	20061




Leaded intermediate tray Long lead (LH)




Leaded intermediate tray Short lead (LH)



Leaded stopend starter tray Short lead (LH)



Leaded corner starter tray short lead (LH)



Leaded ridge tray (LH/RH)