

Bluebay Brickwork Masonry Reinforcement

Stainless Steel Universal Wall Starter System

The Stainless Steel Wall Starter System joins new walls to existing masonry. Suitable for both internal and external brick or block walls, the connectors can be slotted together up to a maximum of 8 metres or 3 storeys high, from 60 to 250mm thick.




The pack contains the fixings necessary for a single leaf wall up to 2.4m.

Universal Wall Starters

	Wall Starter Pack contents
	2 no. wall connectors 1.2m long stainless Steel
	5 no. Plugs, coach screws and washers
	10no. wall connector ties, stainless steel

Soffit Vent

A durable corrosion-resistant stainless steel mesh used at eaves vents to exclude birds and insects

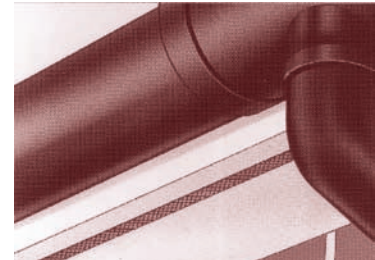


Soffit Mesh

Size

30m x 75mm

Galvanised Riblath

A key for plastering and rendering rib-lath with its stiffening ribs provides a good key for deeper coatings of plaster or render. As well as being used for walls rib-lath can also be used for partitions and ceilings.



Galvanised Riblath

Size

2500mm x 600mm

Fixed through the rib section with galvanised nails or around the rib with galvanised staples or tying wire.

Stainless Steel Riblath

A key for plastering and rendering rib-lath with its stiffening ribs provides a good key for deeper coatings of plaster or render. As well as being used for walls rib-lath can also be used for partitions and ceilings.



Galvanised Riblath


Size

2500mm x 600mm

Fixed through the rib section with Stainless Steel nails or around the rib with stainless steel staples or tying wire.

Galvanised Diamondlath

A key for plaster on suspended ceilings and walls this versatile product can also be used to encase steel columns and beams to assist in fire protection.



Galvanised Diamondlath


Size

2438mm x 685mm x 26g

Use internally, fixed with galvanised nails, staples or tying wire.

Stainless Steel Diamondlath

A key for render work externally or for plaster work internally where damp conditions prevail.



Galvanised Riblath

Size

2500mm x 700mm

Fix with stainless steel nails, staples or wire or alternatively proprietary polypropylene anchors to masonry or concrete.

Bluebay Steel Lintels

The range includes Cavity Wall Lintels, Single Wall Lintels, Special Lintels and Lintel Arches.


Cavity Wall Lintels consist of three loading conditions, standard, heavy duty and extra heavy duty in three cavity widths: 50-70mm; 75-90mm & 95-110mm.

Single Wall Lintels consist of internal, angle, channel & inverted 'T' lintels.

Special Lintels range consists of Segmental Arch, Radius Arch, Venetian Arch, Apex, Bay Window, Flat Top Arch, Corner Lintel, Stainless Steel Lintels and any other variation.



Expamets large range of standard lintels covers the majority of conventional building requirements. Our Special lintels section provides the designers an opportunity to use something out of the ordinary.



Single Leaf / Solid Wall Lintels

Type	Ref	Length
Single Leaf / Solid	EXW90A	750 - 2700mm
	EXW100C	750 - 3000mm

Cavity Wall Lintels

Type	Ref	Cavity Width	Length
Standard	EX50S	50 - 75mm	750 - 4800mm
	EX75S	75 - 90mm	750 - 4800mm
	EX95S	95 - 110mm	750 - 4800mm
Heavy Duty	EX75H	75 - 90mm	750 - 4200mm
	EX95H	95 - 110mm	750 - 4200mm
Extra Heavy Duty	EX75XH	75 - 90mm	750 - 2400mm
	EX95XH	95 - 110mm	750 - 2400